



H4/H7




Remove the socket

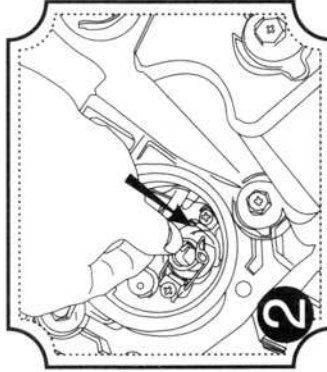


Install and fix the socket

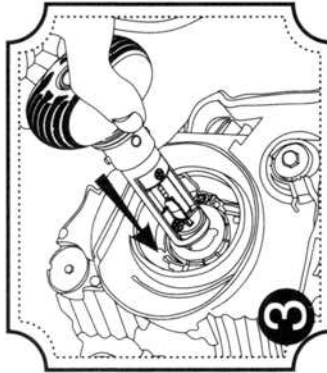

Insert the lamp body as the direction of arrow

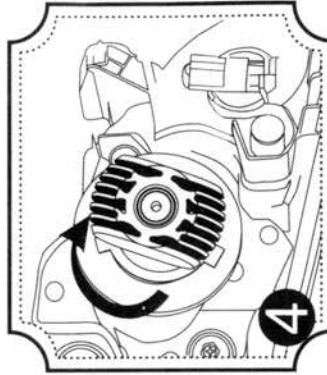


Fix the lamp body by rotate 45° clockwise

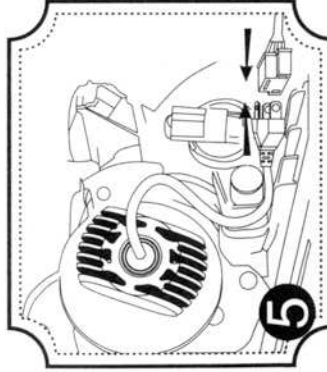

Connect the power line with original car lamp connector


H8/H11/H13/H16JP/P13/9004/9005/9006/9007/PSX24/PSX26

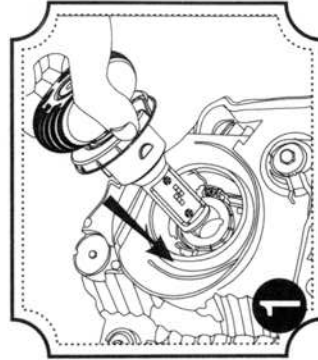

Insert the lamp body as the direction of arrow



Fix the lamp body by rotate 45° clockwise

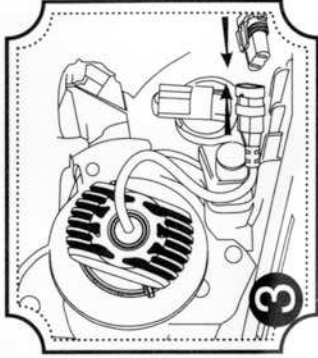

Connect the power line with original car lamp connector

PRODUCT MANUAL

Chuck Adjustment Instruction

The socket of H13/9004/9007 is adjustable for better lighting pattern

